




**STRONG PARTNERS.
TOUGH TRUCKS.™**



TECHNICAL GUIDE J1.5-3.5UT SERIES

WWW.HYSTER.COM



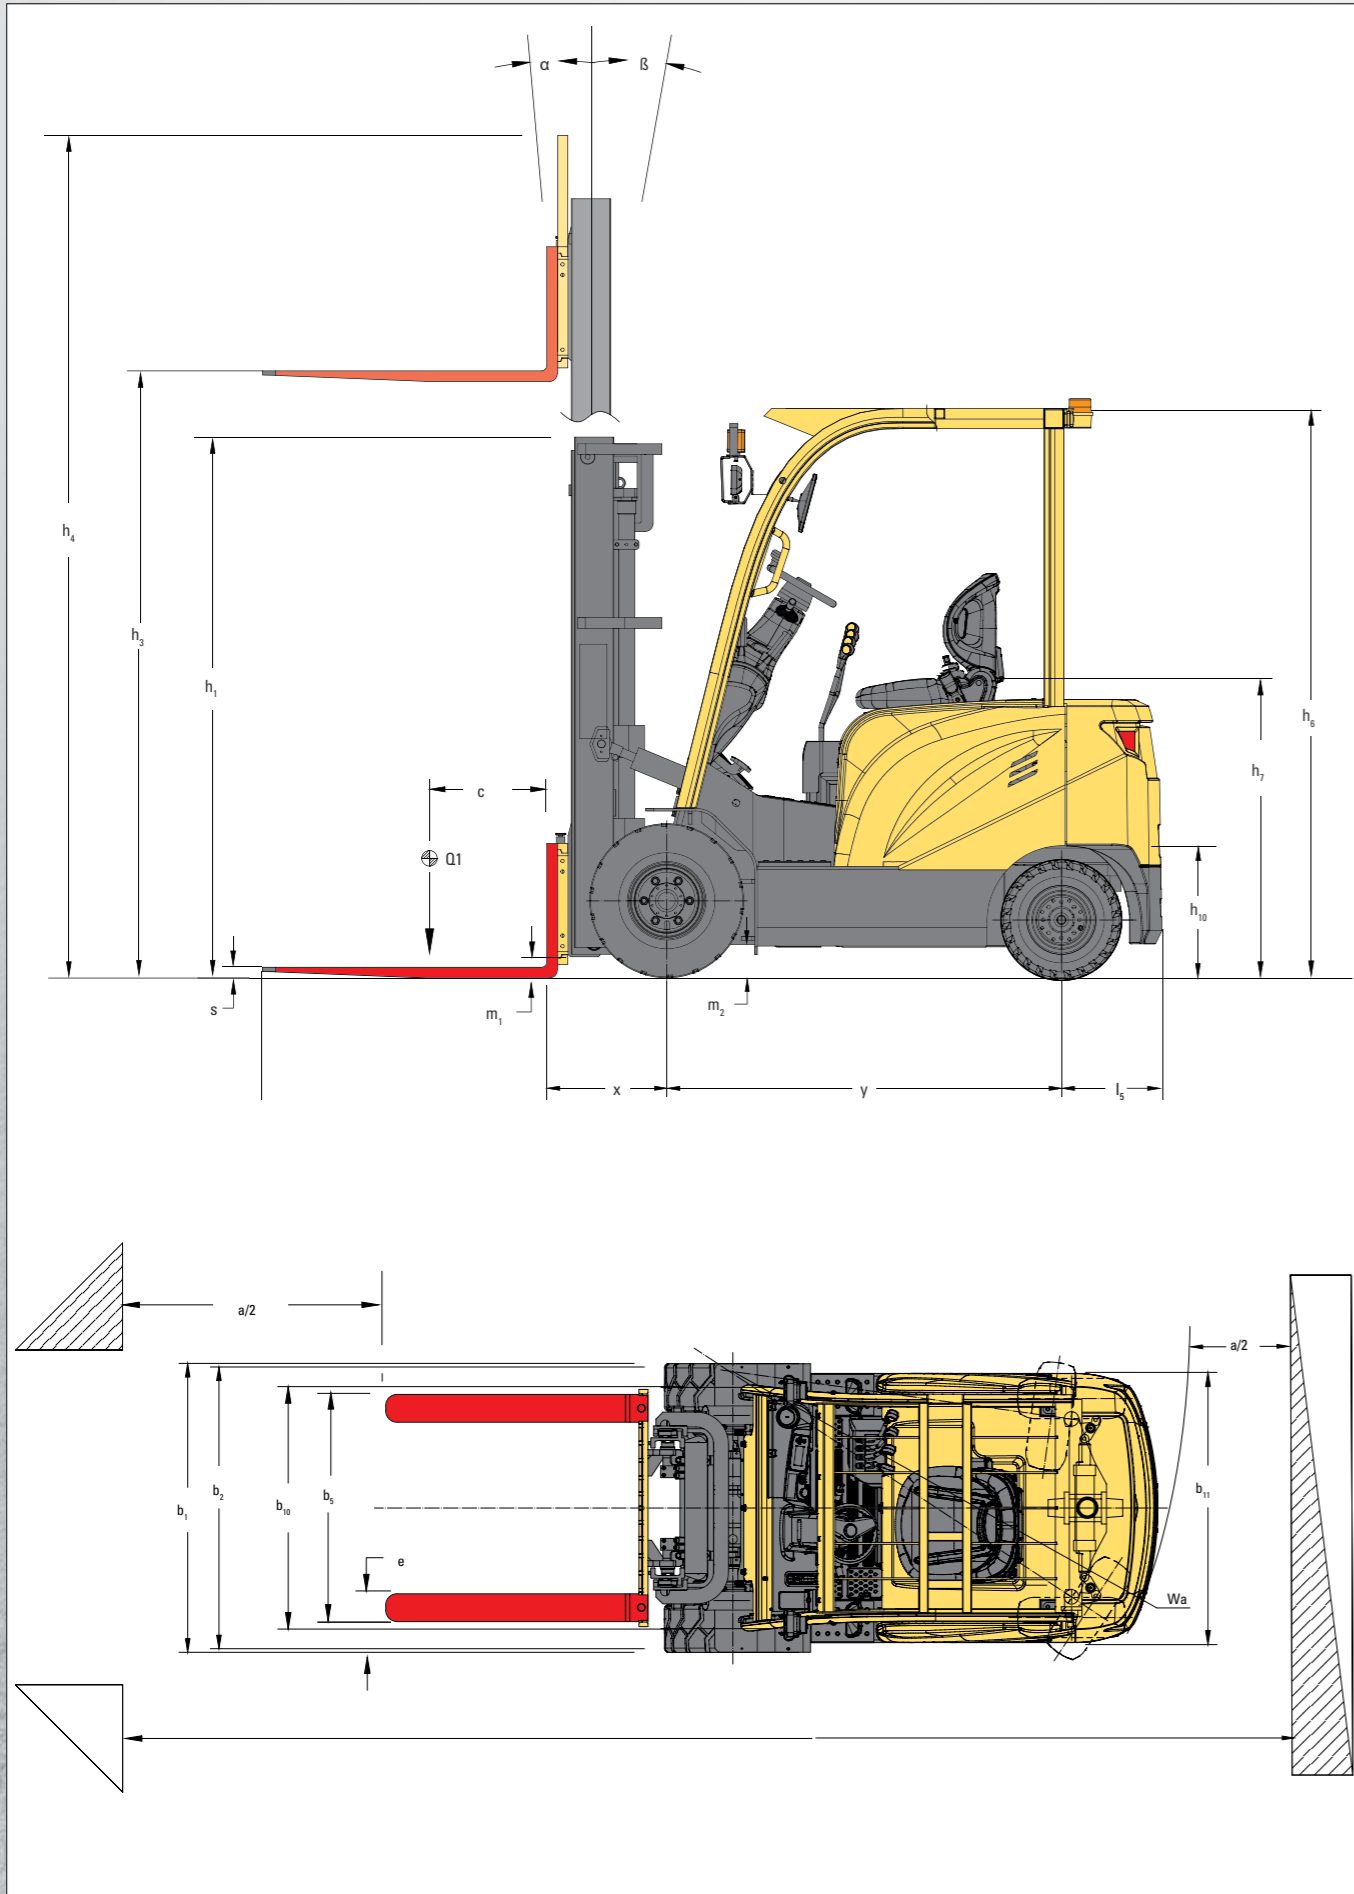

J1.5-1.8UT RATED CAPACITY KG@ 500 MM LOAD CENTRE

	Maximum fork height $h_3 + s$ (mm)	Mast tilt		Lowered height h_1 (mm)		Extended height h_4 (mm) (1)		Extended height h_4 (mm) (2)		Free lift height $h_2 + s$ (m) (1)	Load center 500mm	
		FWD tilt (°)	Back tilt (°)	J1.5UT	J1.8UT	J1.5UT	J1.8UT	J1.5UT	J1.8UT		J1.5UT	J1.8UT
2-STAGE LIMITED FREE LIFT	3300	5	10	2140	2140	4284	4284	3813	3813	135	1500	1800
	3500	5	10	2240	2240	4484	4484	4013	4013	135	1500	1800
	4000	5	10	2540	2540	4984	4984	4513	4513	135	1400	1700
3-STAGE FULL FREE LIFT	4500	5	6	2040	2040	5484	5484	5013	5013	1470	1200	1400
	4800	5	6	2140	2140	5784	5784	5313	5313	1570	1100	1200
	5500	3	6	2405	2405	6484	6484	6013	6013	1835	750	850
	6000	3	6	2590	2590	6984	6984	6513	6513	2040	450	550

J2.0-2.5UT RATED CAPACITY KG@ 500 MM LOAD CENTRE

	Maximum fork height $h_3 + s$ (mm)	Mast tilt		Lowered height h_1 (mm)		Extended height h_4 (mm) (1)		Extended height h_4 (mm) (2)		Free lift height $h_2 + s$ (m) (1)	Load center 500mm	
		FWD tilt (°)	Back tilt (°)	J2.0UT	J2.5UT	J2.0UT	J2.5UT	J2.0UT	J2.5UT		J2.0UT	J2.5UT
2-STAGE LIMITED FREE LIFT	3300	5	10	2165	2165	3915	3915	4317	4317	140	2000	2500
	3500	5	10	2265	2265	4115	4115	4517	4517	140	2000	2500
	4000	5	10	2565	2565	4615	4615	5017	5017	140	2000	2500
3-STAGE FULL FREE LIFT	4500	5	6	2075	2075	5171	5171	5516	5516	1440	1600	2000
	4800	5	6	2175	2175	5471	5471	5816	5816	1540	1250	1700
	5500	3	6	2440	2440	6171	6171	6516	6516	1800	900	1200
	6000	3	6	2625	2625	6671	6671	7016	7016	1990	700	800

J3.0UT RATED CAPACITY KG@ 500 MM LOAD CENTRE

	Maximum fork height $h_3 + s$ (mm)	Mast tilt		Lowered height h_1 (mm)	Extended height h_4 (mm) (1)	Extended height h_4 (mm) (2)	Free lift height $h_2 + s$ (m) (1)	Load center 500mm
		FWD tilt (°)	Back tilt (°)	J3.0UT	J3.0UT	J3.0UT		J3.0UT
2-STAGE LIMITED FREE LIFT	3300	5	10	2195	3940	4440	165	3000
	3500	5	10	2295	4140	4640	165	3000
	4000	5	10	2595	4640	5140	165	2850
3-STAGE FULL FREE LIFT	4500	5	6	2095	5165	5640	1510	2500
	4800	5	6	2195	5465	5940	1610	2250
	5500	3	6	2460	6165	6640	1865	1600
	6000	3	6	2645	6665	7140	2060	1200

J3.5UT RATED CAPACITY KG@ 500 MM LOAD CENTRE

	Maximum fork height $h_3 + s$ (mm)	Mast tilt		Lowered height h_1 (mm)	Extended height h_4 (mm) (1)	Extended height h_4 (mm) (2)	Free lift height $h_2 + s$ (m) (1)	Load center 500mm
		FWD tilt (°)	Back tilt (°)	J3.5UT	J3.5UT	J3.5UT		J3.5UT
2-STAGE LIMITED FREE LIFT	3300	5	10	2270	4010	4440	170	3500
	3500	5	10	2370	4210	4640	170	3500
	4000	5	10	2670	4710	5140	170	3300
3-STAGE FULL FREE LIFT	4500	5	6	2170	5250	5650	1510	2800
	4800	5	6	2270	5550	5950	1610	2500
	5500	3	6	2535	6250	6650	1865	1700
	6000	3	6	2720	6750	7150	2060	1300

			HYSTER		HYSTER		HYSTER			
			J1.5UT		J1.8UT		J2.0UT			
GENERAL	1-1	Manufacturer								
	1-2	Model designation	J1.5UT		J1.8UT		J2.0UT			
	1-3	Drive	Electric (battery)		Electric (battery)		Electric (battery)			
	1-4	Operator type	Seated		Seated		Seated			
	1-5	Rated capacity/rated load	Q ₁	t	1500	1800	2000			
	1-6	Load centre distance	c	mm	500	500	500			
	1-8	Load distance, centre of drive axle to fork	x	mm	410	410	454			
	1-9	Wheelbase	y	mm	1380	1380	1485			
	WEIGHT	2-1	Service weight	kg		3030	3310	4040		
2-2		Axle loading with load, front / rear	kg		3940	590	4594	625	5110	930
2-3		Axle loading without load, front / rear	kg		1490	1590	1431	1878	1770	2270
WHEELS	3-1	Tyre type	Superelastic		Superelastic		Superelastic			
	3-2	Tyre size, front	6.00-9		21x8-9		23x9-10			
	3-3	Tyre size, rear	5.00-8		5.00-8		18x7-8			
	3-5	Wheels, number front / rear (x = driven wheels)	2x/2		2x/2		2x/2			
	3-6	Tread, front	b ₁₀	mm	955	955	1058			
	3-7	Tread, rear	b ₁₁	mm	920	920	960			
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	(°)		5 / 10		5 / 10		
4-2		Height, mast lowered	h ₁	mm	2000	2000	2015			
4-3		Free lift (1)	h ₂	mm	135	135	140			
4-4		Lift	h ₃	mm	3000	3000	3000			
4-5		Height, mast extended (3)	h ₄	mm	3980	3980	3980			
4-7		Height of overhead guard (cabin) (4)	h ₆	mm	2155	2155	2152			
4-8		Seat height relating to SIP (2)	h ₇	mm	1080	1080	1080			
4-12		Coupling height	h ₁₀	mm	290	290	250			
4-19		Overall length	l ₁	mm	3026	3026	3372			
4-20		Length to face of forks	l ₂	mm	2106	2106	2302			
4-21		Overall width	b ₁ /b ₂	mm	1120	1120	1285			
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	35 / 100 / 920	35 / 100 / 920	40 / 122 / 1070			
4-23		Fork carriage ISO 2328, class/type A, B	mm		2A		2A			
4-24		Fork carriage width (3)	b ₃	mm	1040	1040	1040			
4-25		Distance between fork-arms	b ₅	mm	200/890	200/890	250 / 1000			
4-31		Ground clearance, laden, below mast	m ₁	mm	95	95	65			
4-32		Ground clearance, centre of wheelbase	m ₂	mm	105	105	95			
4-34-1		Aisle width for pallets 1000 x 1200 crossways	Ast	mm	3580	3580	3879			
4-34-4		Aisle width for pallets 800 x 1200 lengthways	Ast	mm	3780	3780	4009			
4-35		Turning radius	W _a	mm	1970	1970	2155			
4-36	Internal turning radius	b ₁₃	mm	703	703	599				
PERFORMANCE	5-1	Travel speed with / without load	km	h	15.0	15.7	14.8	15.7	15.7	15.7
	5-2	Lifting speed with / without load	mm	s	370	512	315	512	333	500
	5-3	Lowering speed with / without load	mm	s	400	502	390	502	434	415
	5-6	Max. drawbar pull with / without load, 3 minute rating	N		10800	8700	10800	8700	14400	10500
	5-7	Max. gradeability with / without load, 3 minute rating	%		16	23	15	22	20	23
	5-9	Acceleration time, with / without load	s		5.12	4.75	5.25	4.75	5.20	4.78
	5-10	Service brake			Hydraulic		Hydraulic		Hydraulic	
	6-1	Drive motor rating S2 60 min	kW		6.5		6.5		8.5	
	6-2	Lift motor rating at S3 15% rating	kW		8.6		8.6		11.0	
	MOTOR	6-3	Battery according to DIN 43531/35/36 A, B, C, no	m		s		no		no
6-4		Battery voltage/nominal capacity K5	V	Ah	48	420	48	420	48	600
6-5		Battery weight	kg		720		720		970	
6-6		Power consumption in accordance with VDI cycle	kWh		4.15		4.35		4.95	
8-1		Type of drive unit			AC / Curtis		AC / Curtis		AC / Curtis	
OTHER		10-1	Operating pressure for attachments (5)	bar		138		180		180
	10-3	Oil volume for attachments	l		min		38		38	
	10-4	Sound pressure level at the driver's seat L _{PAZ} (6)	dB		A		70.4		67.9	
	10-5	Towing coupling, type DIN			Yes / Pin		Yes / Pin		Yes / Pin	

MODEL TABLE NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster® truck.

- (1) Bottom of forks
- (2) Full suspension seat in depressed position.
- (3) Without load backrest
- (4) h₆ subject to +/- 5 mm tolerance.

(5) Variable

(6) LPAZ, measured according to the test cycles and based on the weighting values contained in EN12053

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Specification data is based on VDI 2198.

			HYSTER		HYSTER		HYSTER			
			J2.5UT		J3.0UT		J3.5UT			
GENERAL	1-1	Manufacturer								
	1-2	Model designation	J2.5UT		J3.0UT		J3.5UT			
	1-3	Drive	Electric (battery)		Electric (battery)		Electric (battery)			
	1-4	Operator type	Seated		Seated		Seated			
	1-5	Rated capacity/rated load	Q ₁	t	2500	3000	3500			
	1-6	Load centre distance	c	mm	500	500	500			
	1-8	Load distance, centre of drive axle to fork	x	mm	454	475	495.5			
	1-9	Wheelbase	y	mm	1485	1670	1690			
	WEIGHT	2-1	Service weight	kg		4226	4910	5310		
2-2		Axle loading with load, front / rear	kg		5720	1006	6830	970	7956	894
2-3		Axle loading without load, front / rear	kg		1748	2478	2220	2700	2294	3015
WHEELS	3-1	Tyre type	Superelastic		Superelastic		Superelastic			
	3-2	Tyre size, front	23x9-10		23x9-10		23x10-12			
	3-3	Tyre size, rear	18x7-8		18x7-8		200/50-10			
	3-5	Wheels, number front / rear (x = driven wheels)	2x/2		2x/2		2x/2			
	3-6	Tread, front	b ₁₀	mm	1058	1065	1124			
	3-7	Tread, rear	b ₁₁	mm	960	980	1010			
	DIMENSIONS	4-1	Tilt of mast / fork carriage forward / backward	(°)		5 / 10		5 / 10		
4-2		Height, mast lowered	h ₁	mm	2015	2045	2120			
4-3		Free lift (1)	h ₂	mm	140	165	165			
4-4		Lift	h ₃	mm	3000	3000	3000			
4-5		Height, mast extended (3)	h ₄	mm	3980	3980	3980			
4-7		Height of overhead guard (cabin) (4)	h ₆	mm	2152	2152	2138			
4-8		Seat height relating to SIP (2)	h ₇	mm	1080	1080	1080			
4-12		Coupling height	h ₁₀	mm	250	270	270			
4-19		Overall length	l ₁	mm	3387	3614	3759			
4-20		Length to face of forks	l ₂	mm	2317	2544	2689			
4-21		Overall width	b ₁ /b ₂	mm	1285	1285	1365			
4-22		Fork dimensions DIN ISO 2331	s/e/l	mm	40 / 122 / 1070	45 / 122 / 1070	50 / 122 / 1070			
4-23		Fork carriage ISO 2328, class/type A, B	mm		2A		3A			
4-24		Fork carriage width (3)	b ₃	mm	1040	1100	1100			
4-25		Distance between fork-arms	b ₅	mm	250 / 1000	290 / 1060	290 / 1060			
4-31		Ground clearance, laden, below mast	m ₁	mm	65	65	80			
4-32		Ground clearance, centre of wheelbase	m ₂	mm	95	110	83			
4-34-1		Aisle width for pallets 1000 x 1200 crossways	Ast	mm	3879	4025	4101			
4-34-4		Aisle width for pallets 800 x 1200 lengthways	Ast	mm	4009	4225	4301			
4-35		Turning radius	W _a	mm	2155	2349	2405			
4-36	Internal turning radius	b ₁₃	mm	599	830	815				
PERFORMANCE	5-1	Travel speed with / without load	km	h	14.9	15.7	15.0	16.0	15.0	16.0
	5-2	Lifting speed with / without load	mm	s	307	500	385	500	282	500
	5-3	Lowering speed with / without load	mm	s	405	415	420	475	400	355
	5-6	Max. drawbar pull with / without load, 3 minute rating	N		14400	10500	21000	11500	21000	11500
	5-7	Max. gradeability with / without load, 3 minute rating	%		18.0	22.0	20.0	23.0	15.0	22.0
	5-9	Acceleration time, with / without load	s		5.25	4.78	5.05	4.86	5.62	5.32
	5-10	Service brake			Hydraulic		Hydraulic		Hydraulic	
	6-1	Drive motor rating S2 60 min	kW		8.5		11.5		11.5	
	6-2	Lift motor rating at S3 15% rating	kW		11.0		15.0		15.0	
	MOTOR	6-3	Battery according to DIN 43531/35/36 A, B, C, no	m		s		no		no
6-4		Battery voltage/nominal capacity K5	V	Ah	48	600	80	500	80	500
6-5		Battery weight	kg		970		1422		1422	
6-6		Power consumption in accordance with VDI cycle	kWh		6.13		6.32		6.90	
8-1		Type of drive unit			AC / Curtis		AC / Curtis		AC / Curtis	
OTHER		10-1	Operating pressure for attachments (5)	bar		180		180		180
	10-3	Oil volume for attachments	l		min		38		38	
	10-4	Sound pressure level at the driver's seat L _{PAZ} (6)	dB		A		67.9		70.0	
	10-5	Towing coupling, type DIN			Yes / Pin		Yes / Pin		Yes / Pin	

MAST CAPACITY TABLE NOTES:

- (1) Without load backrest
- (2) With load backrest

NOTICE:

Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CE Safety: This truck conforms to the current EU and ANSI requirements.

STANDARD AND OPTIONAL EQUIPMENT

PERFORMANCE	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
2 stage limited free lift mast	STD	STD	STD	STD	STD	STD
3 stage full free lift mast	OPT	OPT	OPT	OPT	OPT	OPT
Lift height - 3300mm (2140mm lowered height)	STD	STD	-	-	-	-
Lift height - 3300mm (2165mm lowered height)	-	-	STD	STD	-	-
Lift height - 3300mm (2195mm lowered height)	-	-	-	-	STD	-
Lift height - 3300mm (2270mm lowered height)	-	-	-	-	-	STD
Various other lift heights	OPT	OPT	OPT	OPT	OPT	OPT
Mast tilt - 5° forward / 6° back	STD	STD	STD	STD	STD	STD
Mast tilt options, lift height dependant	OPT	OPT	OPT	OPT	OPT	OPT
DRIVE	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
Traction speed limiter pre-set to 13km/h (adjustable)	OPT	OPT	OPT	OPT	OPT	OPT
6.00-9 Pneumatic drive tyres	OPT	-	-	-	-	-
6.00-9 Super elastic drive tyres	STD	-	-	-	-	-
6.00-9 Non-marking superelastic drive tyres	OPT	-	-	-	-	-
21x8-9 Pneumatic drive tyres	-	OPT	-	-	-	-
21x8-9 Superelastic drive tyres	-	STD	-	-	-	-
21x8-9 Non-marking superelastic drive tyres	-	OPT	-	-	-	-
23x9-10 Pneumatic drive tyres	-	-	OPT	OPT	OPT	-
23x9-10 Superelastic drive tyres	-	-	STD	STD	STD	-
23x9-10 Non-marking superelastic drive tyres	-	-	OPT	OPT	OPT	-
23x10-12 Superelastic drive tyres	-	-	-	-	-	STD
23x10-12 Non-marking superelastic drive tyres	-	-	-	-	-	OPT
5.00-8 Pneumatic steer tyres	OPT	OPT	-	-	-	-
5.00-8 Superelastic steer tyres	STD	STD	-	-	-	-
5.00-8 Non-marking superelastic steer tyres	OPT	OPT	-	-	-	-
18x7-8 Pneumatic steer tyres	-	-	OPT	OPT	OPT	-
18x7-8 Superelastic steer tyres	-	-	STD	STD	STD	-
18x7-8 Non-marking superelastic steer tyres	-	-	OPT	OPT	OPT	-
200/50-10 Superelastic steer tyres	-	-	-	-	-	STD
200/50-10 Non-marking superelastic steer tyres	-	-	-	-	-	OPT
HANDLING	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
Manual lever hydraulic controls	STD	STD	STD	STD	STD	STD
2 Function (0 auxiliary) hydraulic valve	STD	STD	STD	STD	STD	STD
3 Function (1 auxiliary) hydraulic valve	OPT	OPT	OPT	OPT	OPT	OPT
4 Function (2 auxiliary) hydraulic valve	OPT	OPT	OPT	OPT	OPT	OPT
3 Function hose group (1 auxiliary)	OPT	OPT	OPT	OPT	OPT	OPT
4 Function hose group (2 auxiliary)	OPT	OPT	OPT	OPT	OPT	OPT
970mm Hook type carriage	STD	STD	-	-	-	-
1040mm Hook type carriage	-	-	STD	STD	-	-
1100mm Hook type carriage	-	-	-	-	STD	STD
930mm Integral sideshift carriage	OPT	OPT	-	-	-	-
1040mm Integral sideshift carriage	-	-	OPT	OPT	-	-
1100mm Integral sideshift carriage	-	-	-	-	OPT	OPT
930mm Load backrest	STD	STD	-	-	-	-
940mm Load backrest	-	-	STD	STD	-	-
1080mm Load backrest	-	-	-	-	STD	STD
35 x 100 x 920mm Hook type standard tapered forks	STD	STD	-	-	-	-
40 x 122 x 1070mm Hook type standard tapered forks	-	-	STD	STD	-	-
45 x 122 x 1070mm Hook type standard tapered forks	-	-	-	-	STD	-
50 x 122 x 1070mm Hook type standard taper forks	-	-	-	-	-	STD
Other various fork sizes	OPT	OPT	OPT	OPT	OPT	OPT
ERGONOMICS	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
2155mm Overhead guard	STD	STD	-	-	-	-
2152mm Overhead guard	-	-	STD	STD	STD	-
2138mm Overhead guard	-	-	-	-	-	STD
Standard construction	STD	STD	STD	STD	STD	STD
Full steel cab	OPT	OPT	OPT	OPT	OPT	OPT
Full suspension vinyl seat (SC29) *	STD	STD	STD	STD	STD	STD
Non-suspension vinyl seat with folding backrest *	STD	STD	STD	STD	STD	STD

STANDARD AND OPTIONAL EQUIPMENT

ERGONOMICS (continued)	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
Standard seat belt	STD	STD	STD	STD	STD	STD
Seat belt with sequential interlock	OPT	OPT	OPT	OPT	OPT	OPT
Operator presence system *	STD	STD	STD	STD	STD	STD
Front & top cab panels	OPT	OPT	OPT	OPT	OPT	OPT
Front, top & rear cab panels	OPT	OPT	OPT	OPT	OPT	OPT
Front glass screen with wiper	OPT	OPT	OPT	OPT	OPT	OPT
Rear screen with wiper	OPT	OPT	OPT	OPT	OPT	OPT
Rain cover for overhead guard	OPT	OPT	OPT	OPT	OPT	OPT
Dual mirrors side view	STD	STD	STD	STD	STD	STD
Rear drive handle with horn button	OPT	OPT	OPT	OPT	OPT	OPT
Heater and demister	OPT	OPT	OPT	OPT	OPT	OPT
Directional control lever - mounted on left side of steering column	STD	STD	STD	STD	STD	STD
USB port	STD	STD	STD	STD	STD	STD
Auxiliary DC/DC converter	OPT	OPT	OPT	OPT	OPT	OPT
12V outlet - automotive style socket on dash	STD	STD	STD	STD	STD	STD
VISIBILITY	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
Two front LED work lights with stop, tail, indicator, and reverse lights	STD	STD	STD	STD	STD	STD
Two front / one rear LED work light package with brake / tail / back-up lights with turn signals	OPT	OPT	OPT	OPT	OPT	OPT
OPERATION	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
Amber strobe light - ignition and switch activated	STD	STD	STD	STD	STD	STD
Audible reverse alarm	STD	STD	STD	STD	STD	STD
Pedestrian awareness light (P.A.L.)	OPT	OPT	OPT	OPT	OPT	OPT
Parking alarm *	STD	STD	STD	STD	STD	STD
Key switch start	STD	STD	STD	STD	STD	STD
BATERIES	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
48 Volt	STD	STD	STD	STD	-	-
80 Volt	-	-	-	-	STD	STD
Lead acid battery power truck configured to operate on lead acid battery power	STD	STD	STD	STD	STD	STD
Battery compartment - 985mm	STD	STD	-	-	-	-
Battery compartment - 1028mm	-	-	STD	STD	STD	STD
Vertical battery extraction	STD	STD	STD	STD	STD	STD
APPEARANCE	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
Hyster yellow paint base truck	STD	STD	STD	STD	STD	STD
Special paint base truck	OPT	OPT	OPT	OPT	OPT	OPT
SUPPLEMENTAL	J1.5UT	J1.8UT	J2.0UT	J2.5UT	J3.0UT	J3.5UT
Literature pack *	OPT	OPT	OPT	OPT	OPT	OPT
CE certification	OPT	OPT	OPT	OPT	OPT	OPT
12 months / 2,000 hours manufacturer's warranty (parts & labour)	STD	STD	STD	STD	STD	STD

*Standard or Optional in select markets or on select models.
Please refer to the Price List for full option configurations.

STRONG PARTNERS. TOUGH TRUCKS.™

FOR DEMANDING OPERATIONS, EVERYWHERE.

Hyster® supplies a complete range of warehouse equipment, IC and electric counterbalanced trucks, container handlers and reach stackers. Hyster® is committed to being much more than a lift truck supplier.

Our aim is to offer a complete partnership capable of responding to the full spectrum of material handling issues: whether you need professional consultancy on your fleet management, fully qualified service support, or reliable parts supply, you can depend on Hyster®.

Our network of highly trained dealers provides expert, responsive local support. They can offer cost-effective finance packages and introduce effectively managed maintenance programmes to ensure that you get the best possible value. Our business is dealing with your material handling needs so you can focus on the success of your business today and in the future.



HYSTER EUROPE

Centennial House, Frimley Business Park, Frimley, Surrey, GU16 7SG, England.

Tel: +44 (0) 1276 538500



www.hyster.eu



infoeurope@hyster.com



[/HysterEurope](https://www.facebook.com/HysterEurope)




[@HysterEurope](https://twitter.com/HysterEurope)



[/HysterEurope](https://www.youtube.com/HysterEurope)



HYSTER-YALE UK LIMITED trading as Hyster Europe. Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey GU16 7SG, United Kingdom. Registered in England and Wales. Company Registration Number: 02636775.

©2020 HYSTER-YALE UK LIMITED, all rights reserved. HYSTER,  and STRONG PARTNERS. TOUGH TRUCKS. are trademarks of HYSTER-YALE Group, Inc.

Hyster products are subject to change without notice. Forklift trucks illustrated may feature optional equipment.